




# REGAL DRAPES

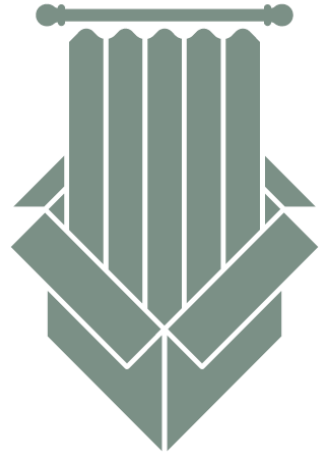

Motorized Shades

Brel Motor & Remote Control Programming

## Getting Started

Get familiar with the instructions before you begin. Not every programming step described below is needed in your situation. Please call Customer Support 800-256-5005, if you have questions.

Please use a ladder (if needed) to reach the motor inside the shade's track. The motor programming button is accessible from the outside, you will need a pin or a small screwdriver to access it.

Please make sure that the Li-ion battery has been charged for at least several hours before you begin. Antenna wire should be outside of the track and not damaged.

## Programming Scenarios

Programming after a complete reset – reset motor to the factory setting, then execute Actions 1 & 2, with optional Action 3.


Adding second remote controller while keeping the end limits - execute Action 5.1.

Adding new remote (when original remote is lost/damaged) – execute Actions 5.2. & 2, with optional Action 3.

Adjusting top and bottom limits – execute Action 4.

## Remote Control Programming

### Remote Control & Motor Buttons

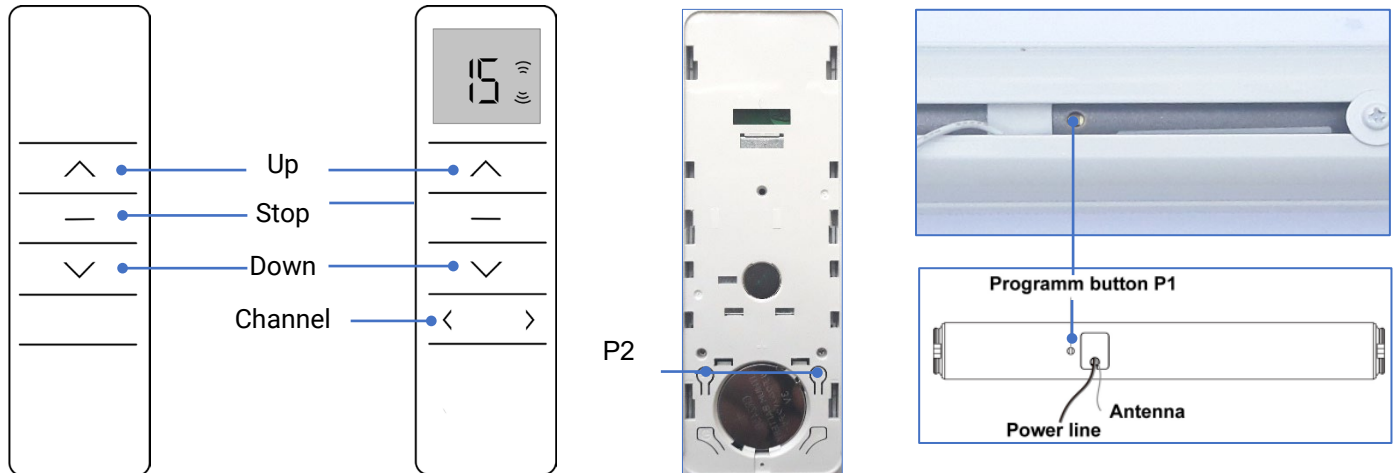

### Motor Operations



**Activate Pairing Mode** - Press & hold P1 Button on the motor with the pin or small screwdriver until motor **jogs once**. Jog is a single short rotation of the motor in both directions. Release the P1 Button.

**Turn motor off and on** - Press & hold P1 Button until motor **jogs 2 times**. Release the P1 Button. To turn the motor on briefly press the P1 Button again.



**Change direction of motor rotation** - Press & hold P1 Button on the motor until motor **jogs 3 times**. Release the P1 Button.

**Reset to the factory setting** - Press & hold P1 Button on the motor until motor **jogs 4 times**. Release the P1 Button. This will erase all settings from the motor including end limits.



## Action 1 - Pairing Motor with New Remote



Press & hold P1 Button  on the motor with the pin or small screwdriver until motor jogs once. 

Select a Channel (if using the multi-channel remote)

Press and hold Stop Button  until motor jogs 2 times.  Release the Stop Button. The Remote and the selected channel are paired with the motor.

## Action 2 - Setting Top & Bottom Limits



**Top:** Move the shade to the desired position. Press & hold Up + Stop  Buttons until motor jogs 2  times.

**Bottom:** Move the shade to the desired bottom position. Press and hold Down + Stop  Buttons until motor jogs 2  times.

**Tip:** If shade is moving in short bursts - press & hold the Up or Down Button for 3+ seconds to start a continuous movement.

## Action 3 - Setting Preferred Position

Move shade to the desired intermediate position.



Open the back cover of the remote and press P2 Button  until motor jogs once. 



Press and hold Stop Button  until motor jogs once. 



Press and hold Stop Button  until motor jogs 2 times.  The preferred position is set.



Press and hold Stop Button for 3 seconds to move shade to the preferred position.

## Action 4 - Re-Adjusting Top & Bottom Limits

**Top:** Move shade to the current top position. Press & hold Up + Stop Buttons  until motor jogs once. 



Move to the desired top position. Press and hold Up + Stop Buttons  until motor jogs 2 times. 



**Bottom** – Move shade to the current bottom position, Press & hold Down + Stop Buttons  until motor jogs once. 



Move to the desired bottom position. Press & hold Down + Stop Button  until motor jogs 2 times. 

## Action 5 - Add New Remote



**Option 5.1. Adding new Remote B using existing Remote A** (This operation keeps preset top & bottom limits)

Open the back cover of the **Remote A** and press P2 Button  until motor jogs once. 

Again press & hold P2 Button  on **Remote A** until motor jogs  once.

Open the back cover of the **Remote B** and press P2 Button  until motor jogs 2 times. 

**Option 5.2. Adding new remote** (when original remote control lost or damaged, the end limits need to be set again)

Press & hold P1 Button  on the motor until motor jogs once. 

Press and hold Stop Button  until motor jogs 2 times. 



Thank you for choosing Regal Drapes. We are proud to make your shades with careful attention to every detail. We hope you enjoy your shades for many years to come.

The Regal Drapes Team